

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 175 979 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

30.01.2002 Bulletin 2002/05

(51) Int Cl.7: B27F 7/38

(21) Application number: 01250280.3

(22) Date of filing: 26.07.2001

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 26.07.2000 JP 2000225231

(71) Applicant: MAX CO., LTD.
Chuo-ku, Tokyo (JP)

(72) Inventors:

- Takeuchi, Sadayoshi, c/o Max Co., Ltd
Tokyo (JP)
- Fujishima, Atsuyoshi, c/o Max Co., Ltd
Tokyo (JP)
- Kaneko, Yoshihiro, c/o Max Co., Ltd
Tokyo (JP)


(74) Representative: Pfennig, Meinig & Partner GbR
Mozartstrasse 17
80336 München (DE)

(54) Roll staple cartridge

(57) A staple cartridge which is composed in order to guide a leading end 20a of a replacing roll staple 20 provided with a binding band 21 to a guide path 12 with pulling out a leading end of the binding band 21 from a front portion 11 of an openable and closable lid 2 to load the roll staple 20 and with rotating the roll staple 20 in a staple loading room 6 in a state in which the lid 2 is

closed. Roll abutment portions 10 are arranged on the inner surface 2a of the staple loading room 6, the roll staple 20 which is located between the roll abutment portions, are rotatably held by them striding an adhesive portion A to prevent a contact between the inner surface 2a and an adhesive portion A which has an adhesive material.

FIG. 4

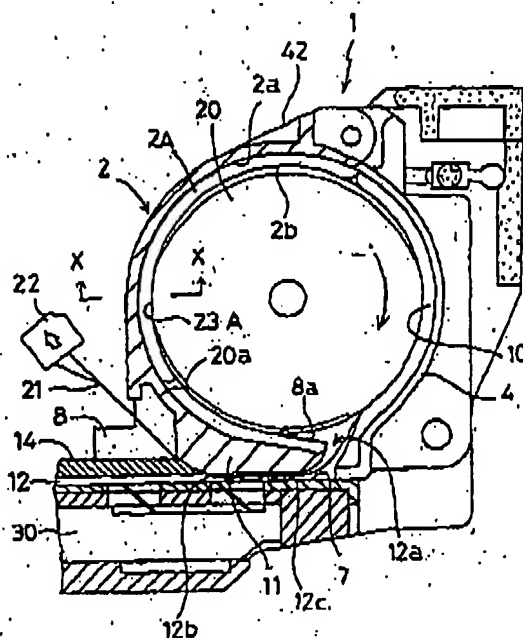

EP 1 175 979 A2